



深圳市兴华鑫电子科技有限公司

Shenzhen xinghuaxin Electronic Technology Co., Ltd

承認書

SPECIFICATION FOR APPROVAL

客戶 (Customer):

客戶料號 (Customer P/N):

興華鑫型號 (Supplier P/N):

XHxDZ-16MM 骨传导喇叭

產品名稱 (Description):

喇叭 (Speaker)

產品規格 (Specification):

16*5mm

客戶承認欄 (Customer Authorization Signature)	深圳市興華鑫電子科技有限公司 承認欄 (Supplier Audit)		
	審核	檢查	制作
	唐国兴	唐玉来	吴银娟
	日期: 2022 年 04 月 19 日 版次: A		

声音让生活更精彩!

地址: 深圳市宝安区新安街道新乐社区新乐路 88 号厂房四层

TEL: 0755-27892904 13652428659

QQ: 438730351 2993501458

E-mail: jacky.tang@jsxhxdz.com

Http: www.jsxhxdz.com

深圳市兴华鑫电子科技有限公司

产品规格内容

1. Scope

The applications of this Speaker are subjected to the following items;

2. General specifications.

N O.	ANALYSIS ITEMS	SPECIFICATIONS	
2.1	APPLICATION		
2.2	TRANSDUCING FUNCTION	Speaker	
2.3	OUT SIDE SIZE	16 mm	
2.4	UNIT WEIGHT	2.4g	
2.5	NOMINAL IMPEDANCE	8.0 Ω $\pm$ 15% Ω	At 1.0 KHZ 1.0Vms(sine wave)

3. Micro-speaker mode characteristics(Application for near sound field)

NO .	ANALYSIS ITEMS	SPICIFICATIONS	CONDITIONS
3.1	RESONANCE FREQUENCY		At fo HZ 1.0vrms (sine wave)
3.2	FREQUENCY RANGE	F0 HZ-----20HKHZ	Application: full audible signals
3.3	SOUND PRESSURE LEVEL	88dB $\pm$ 3dB	At 0.1m 0.89V sine wave
		At 0.1m/0.1W8,10,12,15 $\times$ 100 HZ Average(0dB SPL) =20 μ bar	
3.4	RATED POWER	0.8w	At 0.6V (sine wave)
3.5	MAXIMUM POWER	1w	At 1.05V (sine wave)/1minute
3.6	NON-LINEAL DISTORTION FACTOR	Less than max 10%	1KHZ1.0V (Sine Wave)
3.7	OPERATION TEST	No one should perceive noise of sine wave 2.60V of 300 $\sim$ 3.4khz audio frequency put into operation.	
3.8	VIBRATION MODE	Rated input:1.0V. Max input:1.2V Resonance frequency (F0): 175 Hz@ 1.0V. (Mounted with dummy set mass 100g)	

深圳市兴华鑫电子科技有限公司

产品规格内容


3.Environmental characteristics.

NO.	ANALYSIS ITEMS	CONDITIONS	
3.1	OPERATING TEMPERATURE RANGE	-20℃--60℃	
3.2	STORAGE TEMPERATURE RANGE	-30℃--70℃	
3.3	APPEARANCE	Should not exist any obstacle to be harmful to normal operation: damages, cracks, rusts, and distortions, etc.	
3.4	RESULTS OF AFTER TEST	Sensitivity difference shall be within (3db) and should satisfy the list on item 3.2,3.6,3.7 .after each following test.	
3.5	TERMINAL STRENGTH	Capable of withstanding (0.5kg) load for (30 sec) without resulting in any damage or rejection.	
3.6	LOAD TEST	Shall be normal after tested, input 0.6V 0.02W White noise (EIA filter)96 Hrs.	
3.7	HIGH TEMPERATURE DURABILITY	60℃±3℃ (96Hrs) and keep (6 Hrs) in a room	
3.8	COLD TEMPERATURE DURABILITY	-20℃±3℃ (96 Hrs) and keep (6 Hrs) in a room	
3.9	HUMIDITY DURABILITY	Temperature: +40 ±2℃ relative humidity: 92.5-95% RH (96 Hrs) and keep (6 Hrs) in a room.	
3.10	TEMPERATURE CYCLE DURABILITY	Low temperature -30±2℃ (2Hr). High temperature +70 ±2℃ (1Hr): 1 cycle: total 24 cycles and then keep(6Hr) in a room.	
3.11	VIBRATION DURABILITY	Vibration duration: X Y Z axis, frequency range :10—55Hz, Sweep ratio:10-55-10HZ/one Minute, Vibrationamplitude:1.5mm,Endurance:2 Hr each plan.	
3.12	DROP TEST	Time :3 times (corner, side, plain) Height: from 75cm on the concrete floor	

深圳市兴华鑫电子科技有限公司

产品规格内容

4. Product Outside View

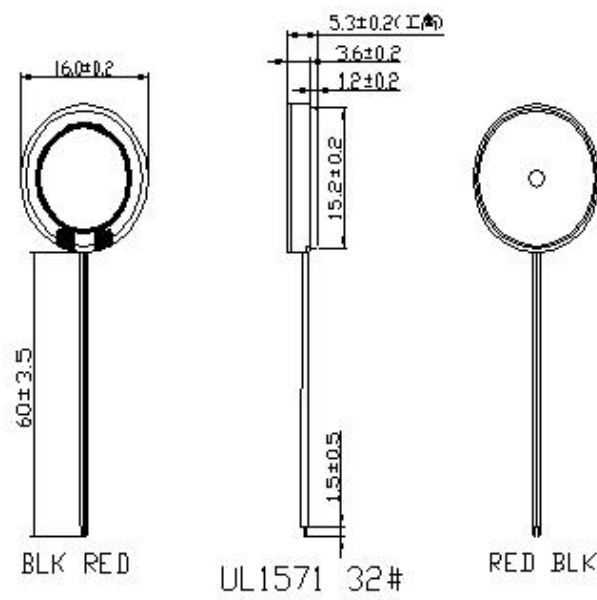

5. PACKING DETAILED DATA

GSM	TITLE	SPEAKER
	MODEL	