

深圳市兴华鑫电子科技有限公司 Shenzhen xinghuaxin Electronic Technology Co., Ltd

承認書

SPECIFICATION FOR APPROVAL

客戶(Customer):	
客戶料號(Customer P/N):	
興華鑫型號(Supplier P/N):	XHXDZ-2455 引线无源压电
產品名稱(Description):	蜂鸣器(Buzzer)
產品規格(Specification):	24*5.5MM 4.0KHZ

客戶承認欄	深圳市興華鑫電子科技有限公司 承認欄
(Customer Authorization	(Supplier Audit)
Signature)	
	審核制作
	唐国兴
	日期: 2022 年 04 月 19 日
	版次: A

当音让生活更精彩!

地址:深圳市宝安区新安街道新乐社区新乐路 88 号厂房四层

TEL: 0755-27892904 13652428659

QQ: 438730351 2993501458 E-mail: xhxdzsound@163.com

Http: www.jsxhxdz.com

		产品参	数		
Customer:			Part No:		
Product: Piezoelectric Buzzers			XA Part No: MZ-2455		
		Technical 7	Terms		
Resonant Frequency (KHZ)			4±0.5		
Rated Voltage (VP-P)			5.0		
Operating Voltage (VP-P)			1~25		
Max. Current Consumption at Rated Voltage (mA)		3.0			
Capacitance at 100Hz (nf)		15±30%			
Min. Sound Output at 10cm at Rated Voltage (dB)		85			
Operating Temperature (°C)		-20~+70			
Storage Temperature (°C)			-30~+70		
Housing Material			ABS(Black)		
Buzzer Soldering process Temp.(°C)		Soldering Parameter			
		Temp.(°C)	Time	(Sec.)	Times
Inclusive	Reflow soldering	230±10	ab	ove 170°C time 40~70	2
	Wave soldering	245±5	3~6		1~2
	Manual soldering	330±10	1~2		1~2
Lead Free	Reflow soldering	245±15	ab	ove 180°C time 40~70	3
	Wave soldering	260±5	4~8		2~3


APPEARANCE DRAWING


★ Manual soldering

Tol: ± 0.5 Unit: mm

1~3

350±10

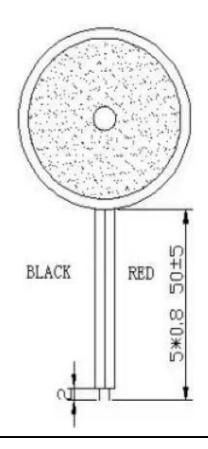



2~3