



深圳市兴华鑫电子科技有限公司

Shenzhen xinghuaxin Electronic Technology Co., Ltd

承認書

SPECIFICATION FOR APPROVAL

客戶(Customer):

客戶料號(Customer P/N):

興華鑫型號(Supplier P/N):

XHxDZ-3015-220V

產品名稱(Description):

蜂鸣器(Buzzer)

產品規格(Specification):

30*15MM

客戶承認欄 (Customer Authorization Signature)	深圳市興華鑫電子科技有限公司 承認欄 (Supplier Audit)		
	審核	檢查	制作
	唐国兴	唐玉来	吴银娟
	日期: 2022 年 04 月 19 日 版次: A		

声音让生活更精彩!

地址: 深圳市宝安区新安街道新乐社区新乐路 88 号厂房四层

TEL: 0755-27892904 13652428659

QQ: 438730351 2993501458

E-mail: xhxdzsound@163.com

Http: www.jsxhxdz.com

SPECIFICATIONS

Model No.

XHXDZ-3015-220V

1/3


1. ELECTRICAL AND ACOUSTICAL SPECIFICATION

NO.	Item	Unit	Specifications
1-1	Rated Voltage	VAC	220
1-2	Coil Resistance	Ω	200~240
1-4	* Min Sound Output at 10cm	dB	85
1-5	* Resonant Frequency	Hz	2300 ± 500
1-6	Operating Temperature	$^{\circ}\text{C}$	-20~+45
1-7	Storage Temperature	$^{\circ}\text{C}$	-20~+60
1-8	Weight	g	7
1-9	Housing Material	PBT	
1-10	Lead Pin Material	Red Copper (DAU)	

*Value applying rated voltage (DC)

2. DIENSIONS (UNIT: mm)

Tolerance: $\pm 0.5\text{mm}$ Except Specified

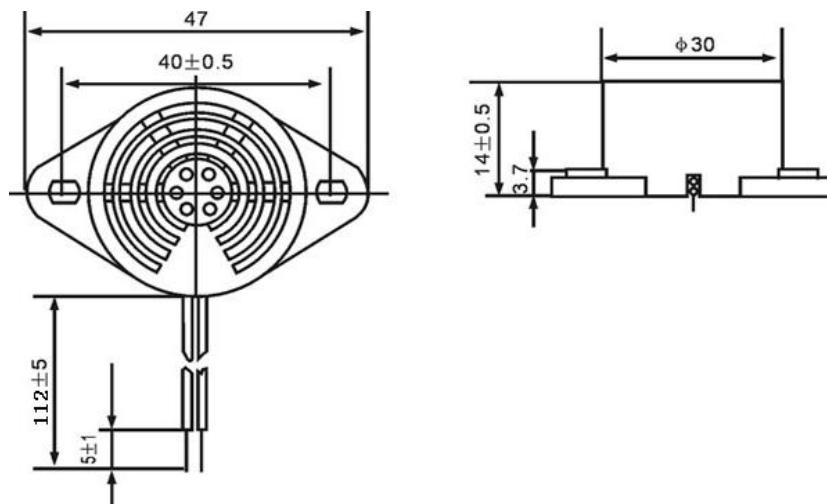

Issue No	Description	Date	Issue	Check	Approval

SPECIFICATIONS


Model No.

XHXDZ-3015-220V


Page

2/3

3. TEST METHOD:

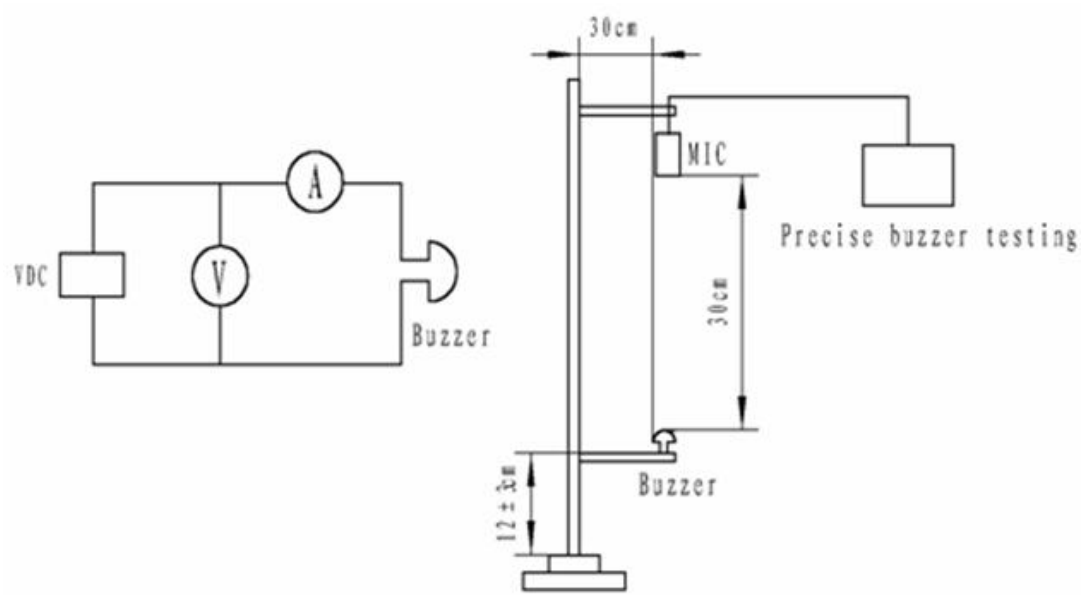

4.SPL & Current Consumption vs. Input Voltage

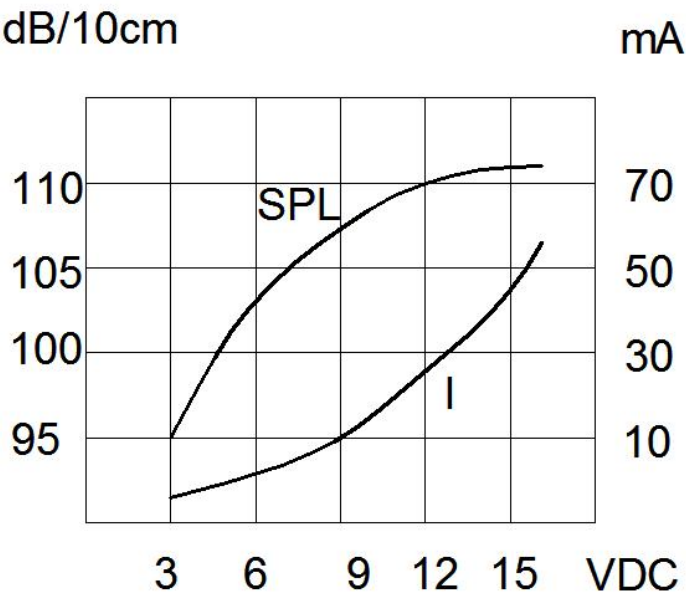

Issue No	Description	Date	Issue	Check		Approval

--	--	--	--	--	--	--

SPECIFICATIONS

Model No.

XHXDZ-3015-220V


Page

3/3

5.RELIABLY TEST:

NO.	ITEM	TESTING CONDITION	VARIANCE AFTER TEST
5-1	Humidity	$40 \pm 2^{\circ}\text{C}$, 93(+2/-3)%RH, 96HRS	All specifications must be satisfied after the test.
5-2	High temp.	$+70 \pm 2^{\circ}\text{C}$, 96HRS	
5-3	Low temp.	$-30 \pm 2^{\circ}\text{C}$, 96HRS	
5-4	Temperature cycling	$-30 \pm 2^{\circ}\text{C}$, 30minutes room temp. 15minutes $+70 \pm 2^{\circ}\text{C}$, 30minutes room temp. 15minutes 5 cycles	
5-5	Drop test	3 times from height of 70cm onto the surface of 10mm thick wooden board.	
5-6	Vibration test	Make the test for the directions of X Y and Z (total 0.5 hours). To-and-fro. sweep time (from 10 to 55 Hz and then 55 to 10) under single amplitude of 10mm is 1minute.	

6.PACKING:

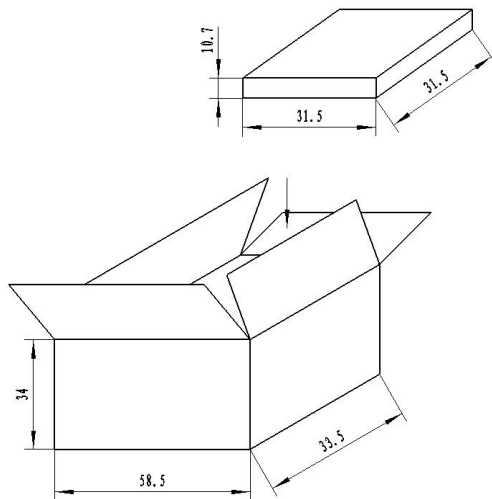

NOTES:

- 1.147 PCS per plate
- 2.Total 5 plate per box
- 3.Total 735 PCS box
- 4.Volume: 34*33.5*58.5cm

Issue No	Description	Date	Issue	Check		Approval