



深圳市兴华鑫电子科技有限公司

Shenzhen xinghuaxin Electronic Technology Co., Ltd

# 承認書

## SPECIFICATION FOR APPROVAL

客戶 (Customer):

客戶料號 (Customer P/N):

興華鑫型號 (Supplier P/N):

XHXDZ-40MM 塑膠复合膜-4  $\Omega$  3W

產品名稱 (Description):

喇叭 (Speaker)

產品規格 (Specification):

|                                                |                                        |     |     |
|------------------------------------------------|----------------------------------------|-----|-----|
| 客戶承認欄<br>(Customer Authorization<br>Signature) | 深圳市興華鑫電子科技有限公司 承認欄<br>(Supplier Audit) |     |     |
|                                                | 審核                                     | 檢查  | 制作  |
|                                                | 唐国兴                                    | 唐玉来 | 吴银娟 |
|                                                | 日期: 2024 年 11 月 04 日<br>版次: A          |     |     |

声音让生活更精彩!

地址: 深圳市宝安区新安街道新乐社区新乐路 88 号厂房四层

TEL: 0755-27892904 13652428659

QQ: 438730351 2993501458

E-mail: [xhxdzsound@163.com](mailto:xhxdzsound@163.com)

Http: [www.jsxhxdz.com](http://www.jsxhxdz.com)

產品規格內容 (SPECIFICATION)


|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                         |      |            |          |       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|------------|----------|-------|
| Model No.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | XHXDZ-40MM 塑膠复合膜-4 Ω 3W | Date | 2024-11-04 | Page No. | 1 / 6 |
| <p>1.使用範圍 (Scope)</p> <p>此份規格書是針對多媒體產品內，所使用的微型揚聲器單體所提出的報告。</p> <p>This specification covers our product of miniature speaker unit for multimedia product.</p> <p>2.标准测试条件(Test condition)</p> <p>一般规格试验状态（特殊要求除外）：常温 5~35℃，常湿 45%~85%，气压 860~1060hPa.</p> <p>判定上有疑问时，试验状态为：温度 20±2℃，相对湿度 60%~70%，气压 860~1060 hPa.</p> <p>The test conditions unless otherwise specified should be normal temperature 5 to 35 ℃,Normal humidity 45 to 85% and normal atmospheric pressure 860 to 1060 hPa,However,if there arises a doubt in judgment,the test conditions shall beas follows:</p> <p>Temperature 20±2℃</p> <p>Humidity 60%~70%</p> <p>Atmosphere 860~1060 hPa</p> <p>3.電聲特性 (ELECTRO-ACOUSTIC CHARACTERISTICS)</p> <p>3.1 額定阻抗(Rated Impedance):</p> <p>4.0Ω ± 20% (AT 1.6K Hz ,1.0 Vrms)</p> <p>3.2 額定輸入功率(Rated Input Power)</p> <p>3.0 Watt (At 3.47 Vrms white noise 96 Hours)</p> <p>3.3 最大輸入功率(Max. Input Power)</p> <p>4.0Watt</p> <p>3.4 最低共振頻率(Resonant Frequency)</p> <p>425 Hz ± 20%</p> <p>3.5 輸出音壓(Output S.P.L)</p> <p>105± 3dB (0.1 Watt , 0.1 Meter. Average at 0.8K,1.0K,1.5K,2.0K Hz)</p> <p>3.6 實效頻率範圍(Frequency Range)</p> <p>Fo ~ 20KHz (By Output S.P.L. -10dB)</p> <p>3.7 失真率(Distortion)</p> <p>Less than 5% (At 1.6KHz , 2.0Vrms)</p> <p>3.8 工作溫度(Operating Temperature)</p> <p>-25℃ ~ +50℃</p> <p>3.9 儲存溫度(Storage temperature)</p> <p>-25℃ ~ +55℃</p> |                         |      |            |          |       |
| 制 定                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                         | 审 核  |            | 核 准      |       |
| 黄立强                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                         | 唐国兴  |            | 文 件 编 号  |       |

產品規格內容 (SPECIFICATION)

|           |                        |      |            |          |       |
|-----------|------------------------|------|------------|----------|-------|
| Model No. | XHXDZ-40MM 塑膠复合膜-4Ω 3W | Date | 2024-11-04 | Page No. | 2 / 6 |
|-----------|------------------------|------|------------|----------|-------|

4.可靠性測試 (Reliability Test)

4.1 高低溫差循環測試(Temperature Cycling Test)

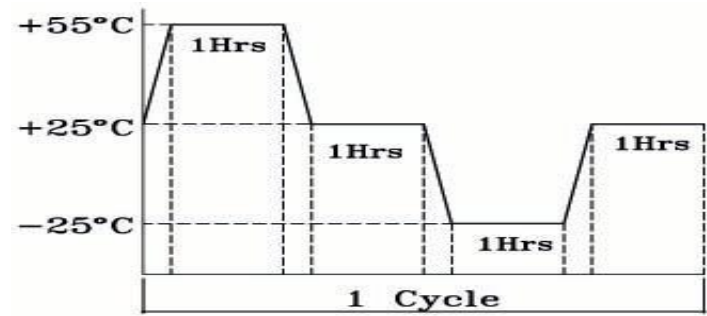

|   |                                                            |
|---|------------------------------------------------------------|
| A | Low Temperature (-25°C±3°C)                                |
| B | High Temperature (+55°C±3°C)                               |
| C | Number of Cycle (3 Cycles)                                 |
| D | Duration of Exposure 1 Hours, at Each Temperature Extremes |
| E | Duration of Recovery 1 Hours                               |

4.2 抗濕度試驗(Humidity Test)

|   |                             |                        |
|---|-----------------------------|------------------------|
| A | 相對濕度(Relative Humidity)     | 90-95% at + 40°C ± 3°C |
| B | 測試時間(Durations)             | 96 Hours               |
| C | 恢復時間(Durations of recovery) | 6 Hours                |

4.3 連續負載測試(Load Test)

White Noise Without Weighted Filter 3.47 Volts.(RMS) 100 Hrs.

4.4 跌落試驗(Drop Test)

75 cm Free Falling On Concrete Floor, 10 Times.

4.5 異常音測試(Buzzes & Rattles)

Sine wave between at 3.0Vrms / 200~5000Hz



4.6 極性測試(Polarity test)

Diaphragm Shall Move Forward When Apply a Positive DC. Current to the “+”or “Marked” Terminal.

產品規格內容 (SPECIFICATION)

| Model No. | XHXDZ-40MM 塑膠复合膜-4Ω3W | Date | 2024-11-04 | Page No. | 3 / 6 |
|-----------|-----------------------|------|------------|----------|-------|
|-----------|-----------------------|------|------------|----------|-------|


5.測量方式 (Measurement Method)

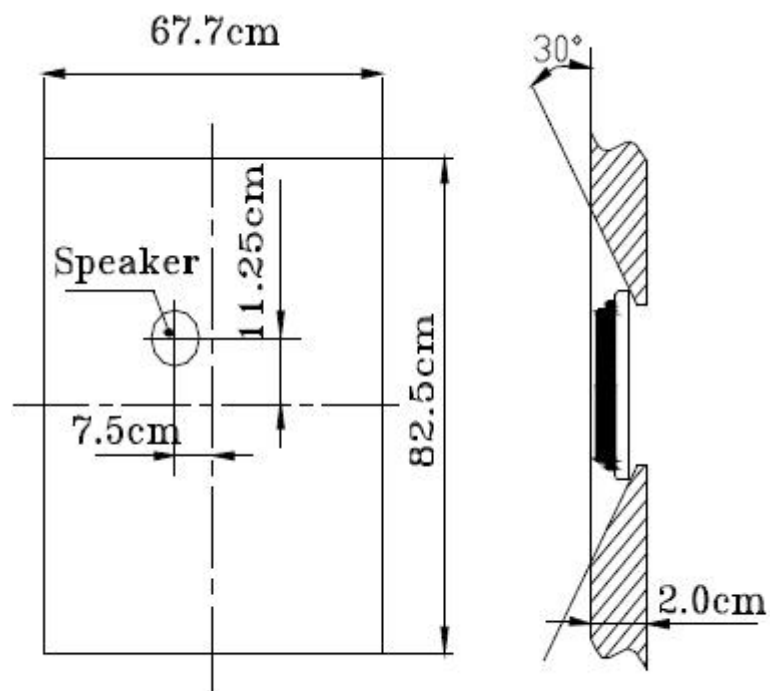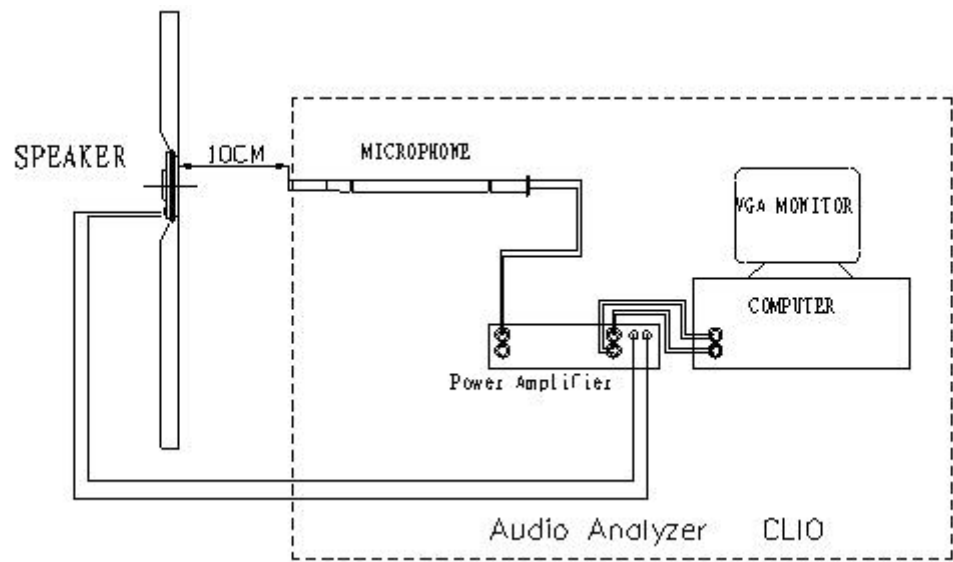


產品規格內容 (SPECIFICATION)

| Model No. | XHXDZ-40MM 塑膠复合膜-4Ω 3W | Date | 2024-11-04 | Page No. | 4/6 |
|-----------|------------------------|------|------------|----------|-----|
|-----------|------------------------|------|------------|----------|-----|

6. 頻率響應曲線圖(Frequency Response Curve)

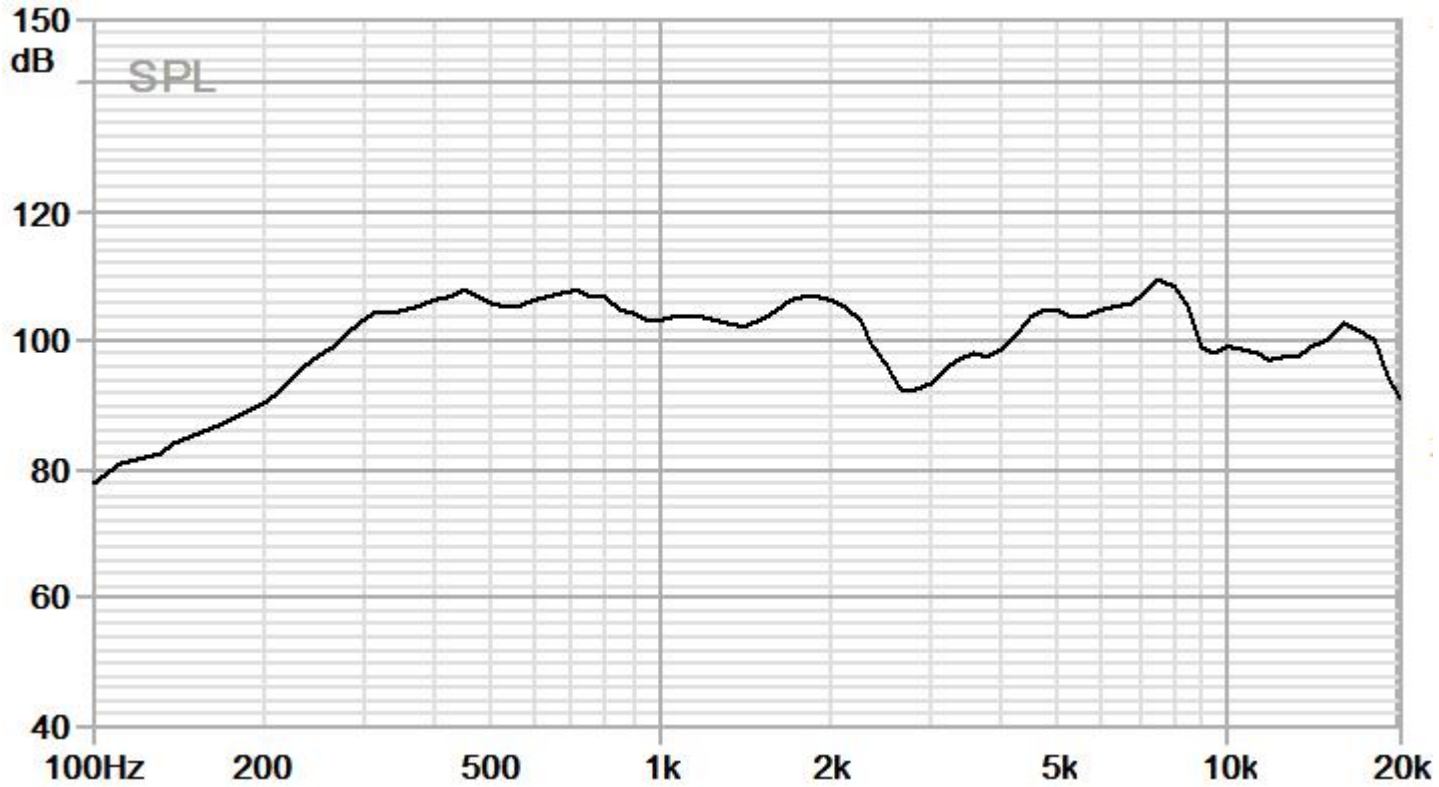

7. 阻抗曲線圖(Impedance Curve)

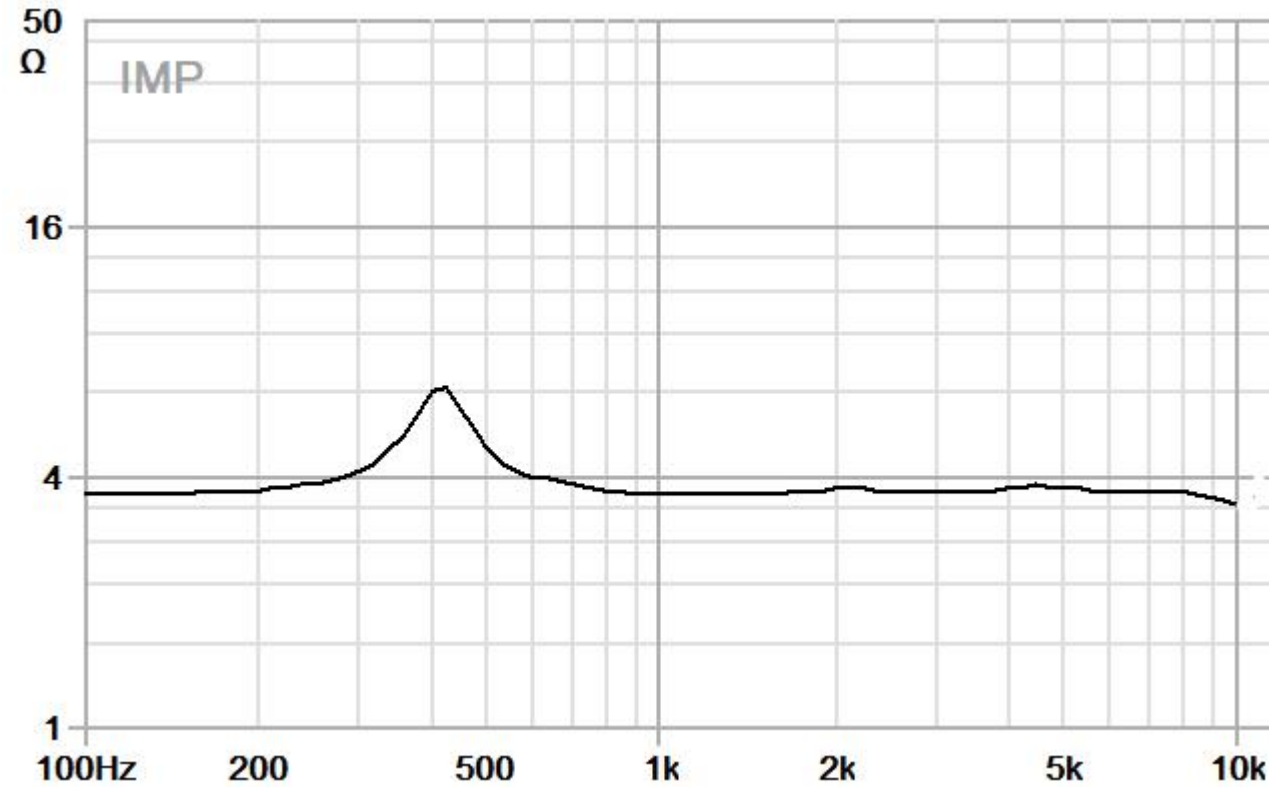


產品規格內容 (SPECIFICATION)

|           |                       |      |            |          |       |
|-----------|-----------------------|------|------------|----------|-------|
| Model No. | XHXDZ-40MM 塑膠复合膜-4Ω3W | Date | 2024-11-04 | Page No. | 5 / 6 |
|-----------|-----------------------|------|------------|----------|-------|

8. 喇叭外觀描述

(Unit:mm tolerance:±0.3)

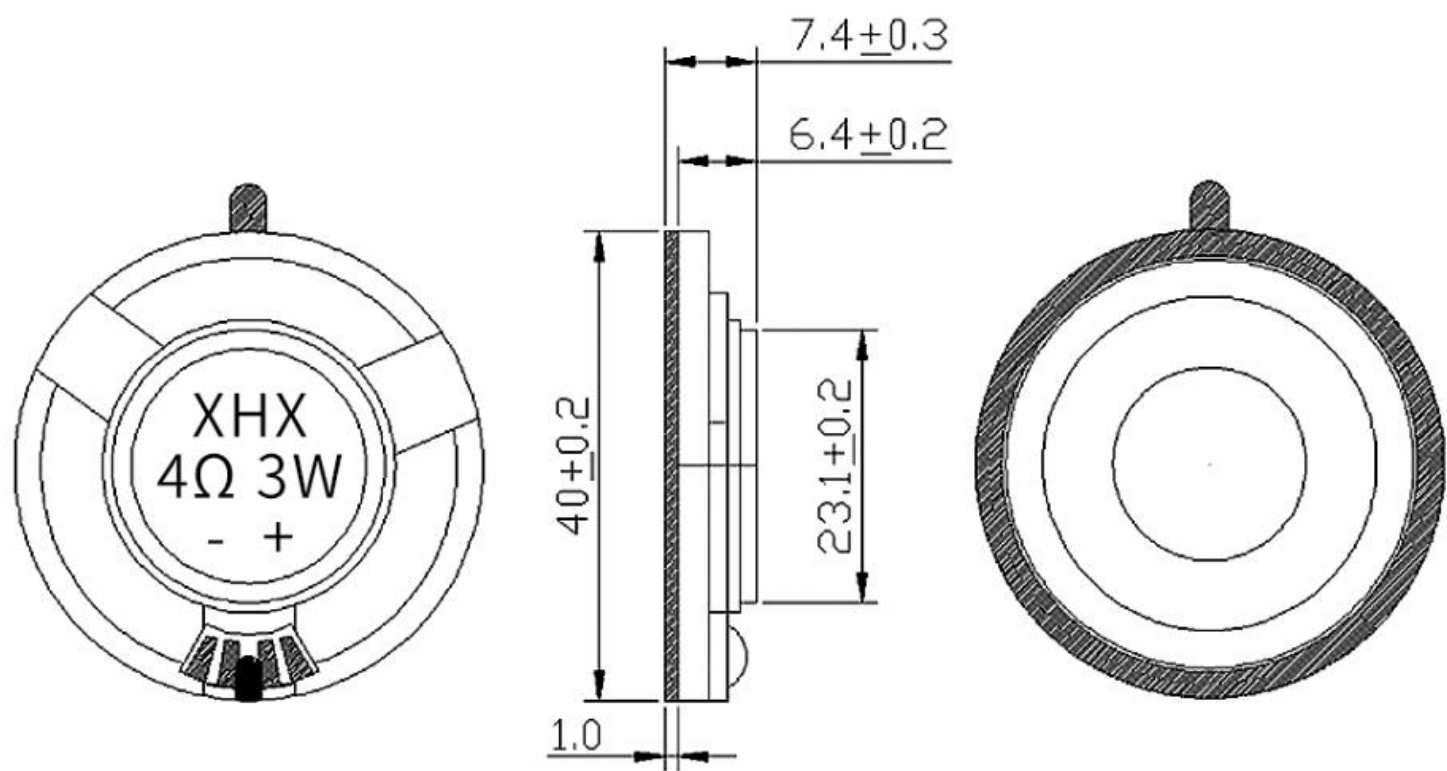

產品規格內容 (SPECIFICATION)

|       |     |                       |      |            |          |     |
|-------|-----|-----------------------|------|------------|----------|-----|
| Model | No. | XHxDZ-40MM 塑膠复合膜-4Ω3W | Date | 2024-11-04 | Page No. | 6/6 |
|-------|-----|-----------------------|------|------------|----------|-----|

9.包裝示意圖(Packing Standard):  
(Unit:cm tolerance:±3)

PACKING STANDARD:

