



深圳市兴华鑫电子科技有限公司

Shenzhen xinghuaxin Electronic Technology Co., Ltd

承認書

SPECIFICATION FOR APPROVAL

客戶 (Customer):

客戶料號 (Customer P/N):

興華鑫型號 (Supplier P/N):

XHXDZ-4070-8 Ω 5W

產品名稱 (Description):

喇叭 (Speaker)

產品規格 (Specification):

4070 翹角铁壳内磁

客戶承認欄 (Customer Authorization Signature)	深圳市興華鑫電子科技有限公司 承認欄 (Supplier Audit)		
	審核	檢查	制作
	唐国兴	唐玉来	吴银娟
	日期: 2022 年 04 月 19 日 版次: A		

声音让生活更精彩!

地址: 深圳市宝安区新安街道新乐社区新乐路 88 号厂房四层

TEL: 0755-27892904 13652428659

QQ: 438730351 2993501458

E-mail: jacky.tang@jsxhxdz.com

Http: www.jsxhxdz.com


深圳市兴华鑫电子科技有限公司

产品规格内容

Our Part No		4070-8 Ω 5W	
Size	Diameter 40 $\times$ 70mm	Total Height	18 mm
No.	Item	Specification	Testing Condition
1.	Rated Imp	8ohm $\pm$ 15%	At 1 kHz 1.0V
2.	Resonance Freq	320Hz $\pm$ 20%	W ithout Baffle
3.	Output S.P.L.	85 $\pm$ 3dB	At 1m 1W 400, 600,800, 1KHz Average
4.	Input Power	Rated Power: 3.0W	Max Power: 5.0W
5.	Frequency Range	F0--- 10KHz	Output S.P.L. - 10dB
6.	Operation	Must Be Normal	Program Source: 3.0W
7.	Buzzes & Rattles	Must Be Normal	Sin Wave 4.0V
8.	Load Test	After Test Meet 2&7	3.0W 48hours W hite Noise
9.	Distortion	5% Max	2.0W 1000Hz
10.	Heat Test	After Test 7&8&9	55C $\pm$ 2C 16 hours
11.	Cold Test	After Test 7&8&9	-20C $\pm$ 3C 16 hours
12.	Humidity	After Test 7&8&9	40C $\pm$ 2C 90 $\sim$ 95% R.H. 48hours
13.	Insulation Resistance	10M Ω	Dc100v FRA. And TER.
14.	Magnet	$\varnothing$ 12.5 $\times$ 2.5	N35
15.	Net Weight	37.4 g/PC	
16.	Polarity	When A Positive D.C Voltage Is Applied To The Terminal (+) Or Red, The Diaphragm Should Move To The Front. Marked	

深圳市兴华鑫电子科技有限公司

产品规格内容

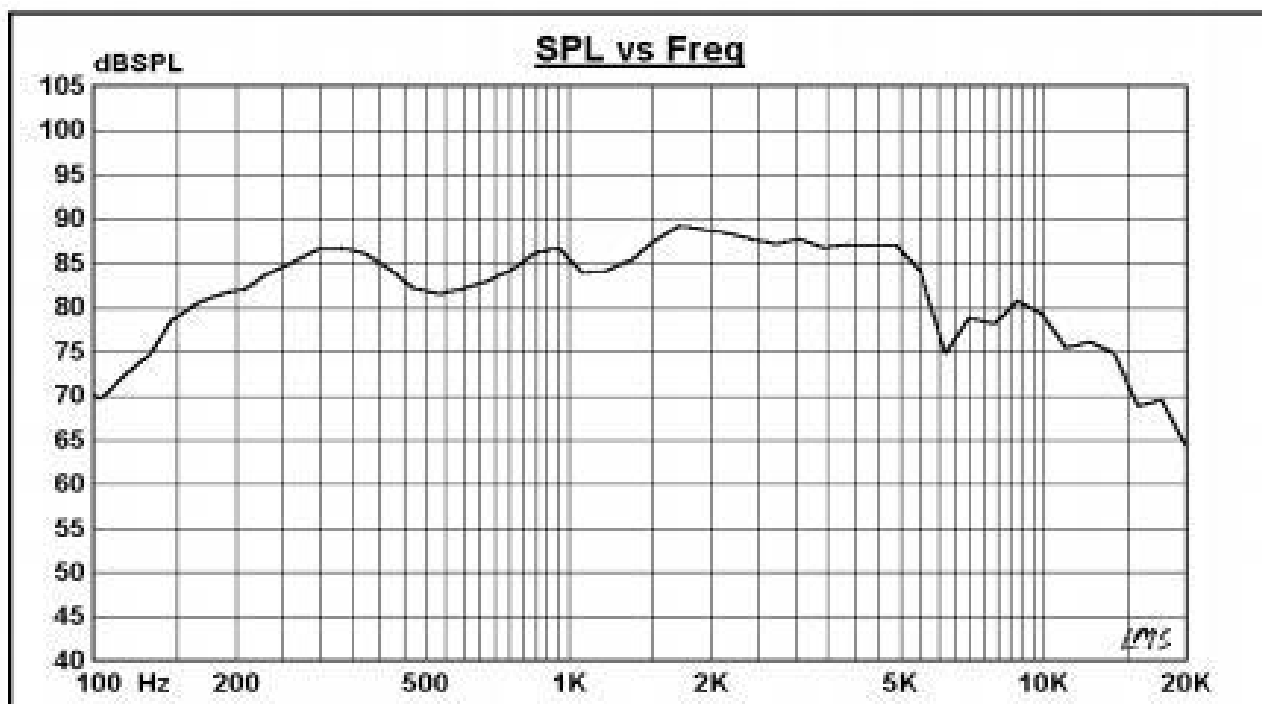

尺寸图

