



深圳市兴华鑫电子科技有限公司
Shenzhen xinghuaxin Electronic Technology Co., Ltd

承認書

SPECIFICATION FOR APPROVAL

客戶 (Customer): _____

客戶料號 (Customer P/N): _____

興華鑫型號 (Supplier P/N): XHXDZ-4140 超声波喇叭

產品名稱 (Description): 喇叭 (Speaker)

產品規格 (Specification): 4140 超声波喇叭

客戶承認欄 (Customer Authorization Signature)	深圳市興華鑫電子科技有限公司 承認欄 (Supplier Audit)		
	審核	檢查	制作
	唐国兴	唐玉来	吴银娟
	日期: 2022 年 04 月 19 日 版次: A		

声音让生活更精彩!

地址: 深圳市宝安区新安街道新乐社区新乐路 88 号厂房四层

TEL: 0755-27892904 13652428659

QQ: 438730351 2993501458

E-mail: xhxdzsound@163.com


Http: www.jsxhxdz.com

SPECIFICATION

Customer:			Part No:		
Product: ultrasonic Buzzers			Part No: XHXDZ-4140 超声波喇叭		
Technical Terms					
Resonant Frequency (KHZ)			36±10		
Rated Voltage (V _{rms})			5.0		
Operating Voltage (V _{rms})			1~30		
Max. Current Consumption at Rated Voltage (mA)			5.0		
Capacitance at 1000Hz (Pf)			100000±30%		
Min. Sound Output at 10cm at Rated Voltage (dB)			85		
Operating Temperature (°C)			-20~+70		
Storage Temperature (°C)			-30~+80		
Housing Material			ABS(Black)		
Environmental Protection Regulation			RoHS		
Buzzer			Soldering Parameter		
Soldering process			Temp.(°C)	Time(Sec.)	Times
Inclusive Lead		Reflow soldering	230±10	above 170°C time 40~70	2
		Wave soldering	245±5	3~6	1~2
		Manual soldering	330±10	1~2	1~2
Lead Free		Reflow soldering	245±15	above 180°C time 40~70	3
		Wave soldering	260±5	4~8	2~3
	★	Manual soldering	350±10	1~3	2~3

Remark: ★ Instance Soldering Process

APPEARANCE DRAWING Tol : Unit: mm

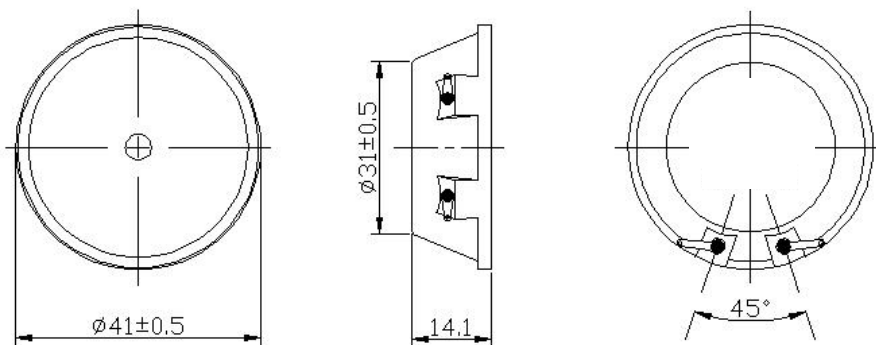

05/10/2016 19:09

CRY6125F 蜂鸣器测试仪 V91

无框 滤波器无

型号:4140

Fc=25029 Hz 099.32 dB


正弦波

电压:3000 mV

Fo=11971 Hz 114.73 dB

0 dB 参考值为: 20.0 μ Pa

扫频速度: 010 ms 中速 扫频模式: 1/192 Oct

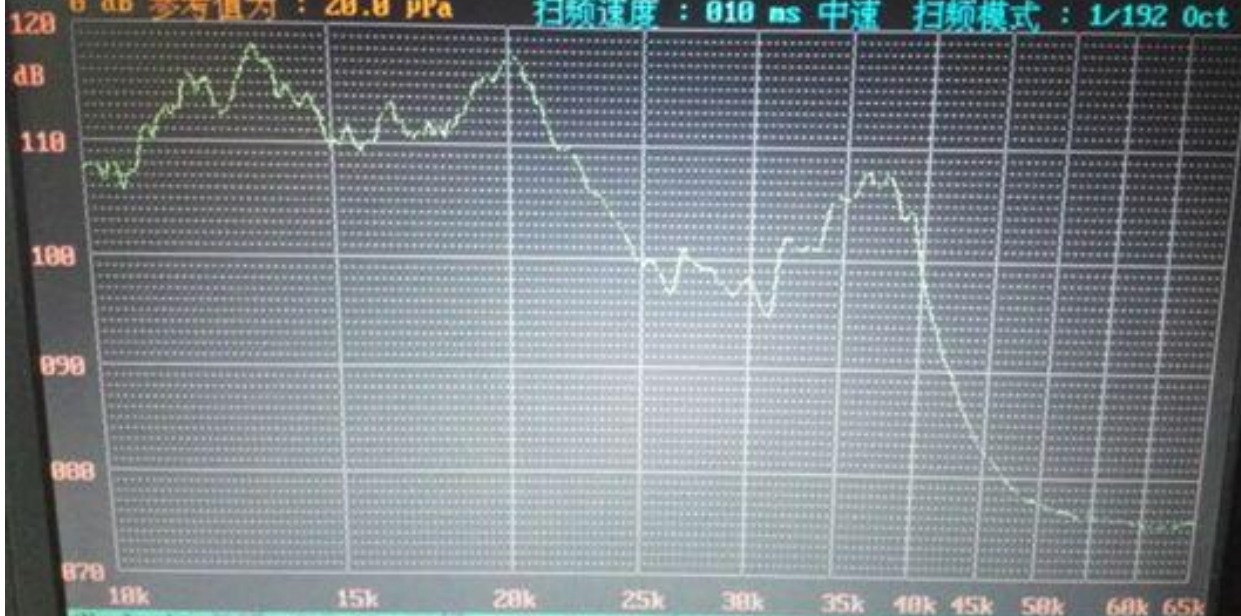

18k 15k 20k 25k 30k 35k 40k 45k 50k 60k 65k
<RunLock>: 连续 <Scroll>: 单帧 <PgUp> <PgDn>: 幅度选择 <F6>: 保存曲线 <F7>: 设置(000000)
<F1>: 上下限设置 <F2>: 单点Fc测量 <F4>: 打印 <F5>: 设置菜单 <F8>: 计数清零 <F10>: 保存