



深圳市兴华鑫电子科技有限公司

Shenzhen xinghuaxin Electronic Technology Co., Ltd

承認書

SPECIFICATION FOR APPROVAL

客戶 (Customer):

客戶料號 (Customer P/N):

興華鑫型號 (Supplier P/N):

XHxDZ-45MM-4 Ω 3W

產品名稱 (Description):

喇叭 (Speaker)

產品規格 (Specification):

45MM 音箱喇叭

客戶承認欄 (Customer Authorization Signature)	深圳市興華鑫電子科技有限公司 承認欄 (Supplier Audit)		
	審核	檢查	制作
	唐国兴	唐玉来	吴银娟
	日期: 2022 年 04 月 19 日 版次: A		

声音让生活更精彩!

地址: 深圳市宝安区新安街道新乐社区新乐路 88 号厂房四层

TEL: 0755-27892904 13652428659

QQ: 438730351 2993501458

E-mail: xhxdzsound@163.com

Http: www.jsxhxdz.com


深圳市兴华鑫电子科技有限公司

产品规格内容

本厂型号 Our Part No		45MM-4 Ω 3W		尺寸 Size	Diameter 45 mm	总高度 Total Height	17.50 mm
序	项目 Item	规 格 Specification			测 定 条 件 Testing Condition		
1	音圈阻抗 Rated Imp	4ohm± 15%			At 1 KHz 1.0V		
2	共振频率 Resonance Freq	320Hz±20%			Without Baffle		
3	出力音压 Output S.P.L.	84±3dB			At 0.5 m 0.5W 600, 800, 1K, 1.2KHz Average		
4	输入功率 Input Power	额定功率 Rated Power 2.0 W			最大功率 Max Power 3.0 W		
5	频率范围 Frequency Range	F0---- 18 KHz			Output S.P.L. -10dB		
6	操作 Operation	Must Be Normal			Program Source: 2.0 W		
7	异常音 Buzzes & Rattles	Must Be Normal			Sin Wave 4.0 V		
8	连续负荷 Load Test	After Test Meet 2&7			2.0 W 24hours White Noise		
9	失真率 Distortion	5% Max			额定功率在1000Hz Rated Power At 1000Hz		
10	耐热试验 Heat Test	After Test 7&8&9			55C±2C 48hours		
11	耐湿试验 Cold Test	After Test 7&8&9			-30C±3C 48hours		
12	湿度 Humidity	After Test 7&8&9			40C±2C 90~95% R.H. 48hours		
13	绝缘电阻 Insulation Resistance	10MΩ			Dc100v FRA. And TER.		
14	磁铁 Magnet	Ø12.5 × 2.5			N35		
15	净重 Net Weight	--g/PCS					
16	极性 Polarity	喇叭正面朝下（左负右正） When A Positive D.C Voltage Is Applied To The Terminal Marked (+) Or Red, The Diaphragm Should Move To The Front.					

深圳市兴华鑫电子科技有限公司

产品规格内容

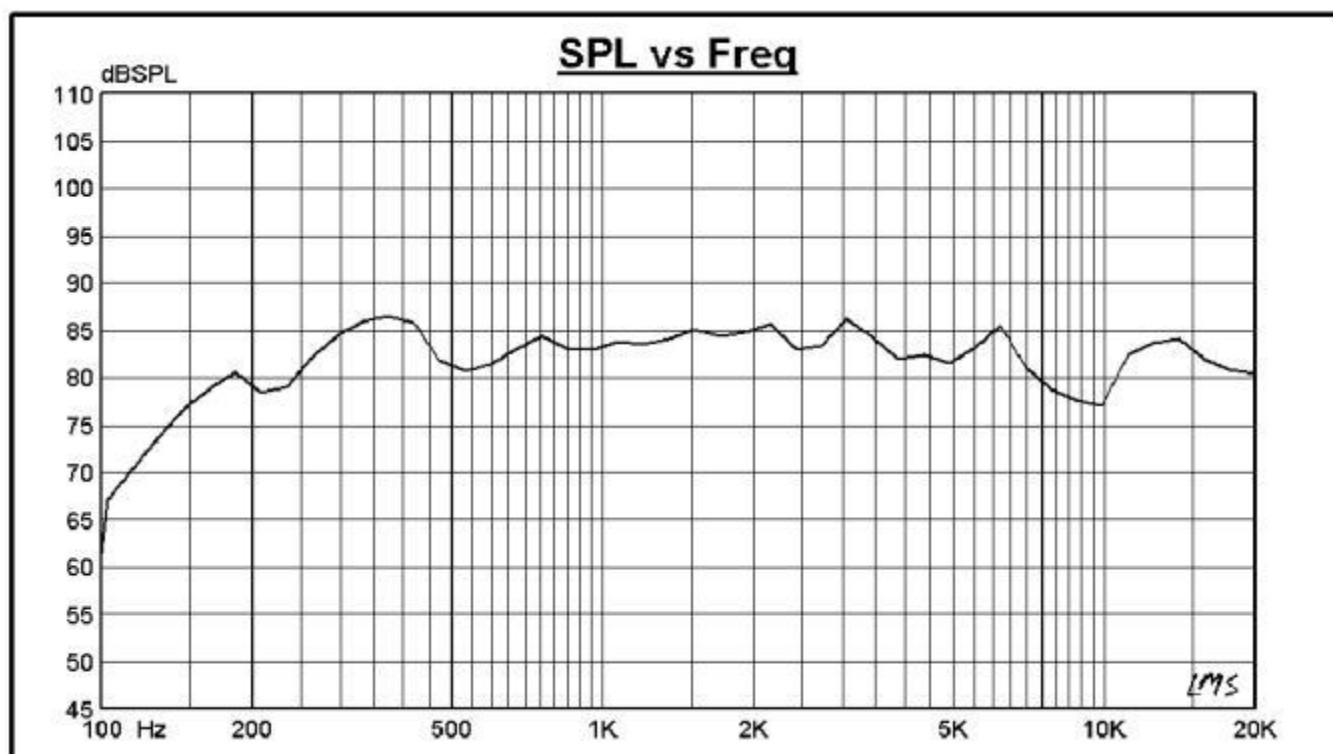

尺寸图

