



深圳市兴华鑫电子科技有限公司
Shenzhen xinghuaxin Electronic Technology Co., Ltd

承認書

SPECIFICATION FOR APPROVAL

客戶 (Customer):

客戶料號 (Customer P/N):

興華鑫型號 (Supplier P/N):

XHxDZ-5140 超声波喇叭

產品名稱 (Description):

喇叭 (Speaker)

產品規格 (Specification):

5140 超声波喇叭

客戶承認欄 (Customer Authorization Signature)	深圳市興華鑫電子科技有限公司 承認欄 (Supplier Audit)		
	審核	檢查	制作
	唐国兴	唐玉来	吴银娟
	日期: 2022 年 04 月 19 日 版次: A		

声音让生活更精彩!

地址: 深圳市宝安区新安街道新乐社区新乐路 88 号厂房四层

TEL: 0755-27892904 13652428659

QQ: 438730351 2993501458

E-mail: xhxdzsound@163.com


Http: www.jsxhxdz.com

SPECIFICATION

Customer:			Part No:		
Product: ultrasonic Buzzers			Part No: XHXDZ-5140 超声波喇叭		
Technical Terms					
Resonant Frequency (KHZ)			20±10		
Rated Voltage (V _{P-P})			5.0		
Operating Voltage (V _{P-P})			1~30		
Max. Current Consumption at Rated Voltage (mA)			2.0		
Capacitance at 1000Hz (Pf)			105000±30%		
Min. Sound Output at 10cm at Rated Voltage (dB)			85		
Operating Temperature (°C)			-20~+70		
Storage Temperature (°C)			-30~+80		
Housing Material			ABS(Black)		
Environmental Protection Regulation			RoHS		
Buzzer			Soldering Parameter		
Soldering process			Temp.(°C)	Time(Sec.)	Times
Inclusive Lead		Reflow soldering	230±10	above 170°C time 40~70	2
		Wave soldering	245±5	3~6	1~2
		Manual soldering	330±10	1~2	1~2
Lead Free		Reflow soldering	245±15	above 180°C time 40~70	3
		Wave soldering	260±5	4~8	2~3
	★	Manual soldering	350±10	1~3	2~3

Remark: ★Instance Soldering Process

APPEARANCE DRAWING Tol : ± 0.5 Unit: mm

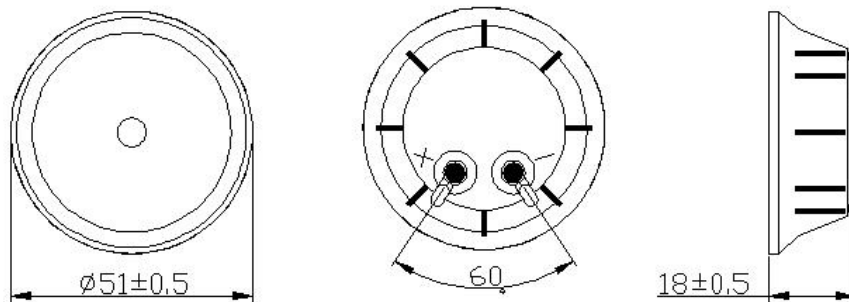

型号:at5140


Fc=40000 Hz 096.76 dB

正弦波

电压:2471 mV

Fo=19248 Hz 117.26 dB

0 dB 参考值为 : 20.0 μ Pa 扫频速度 : 010 ms 中速 扫频模式 : 1/192 Oct

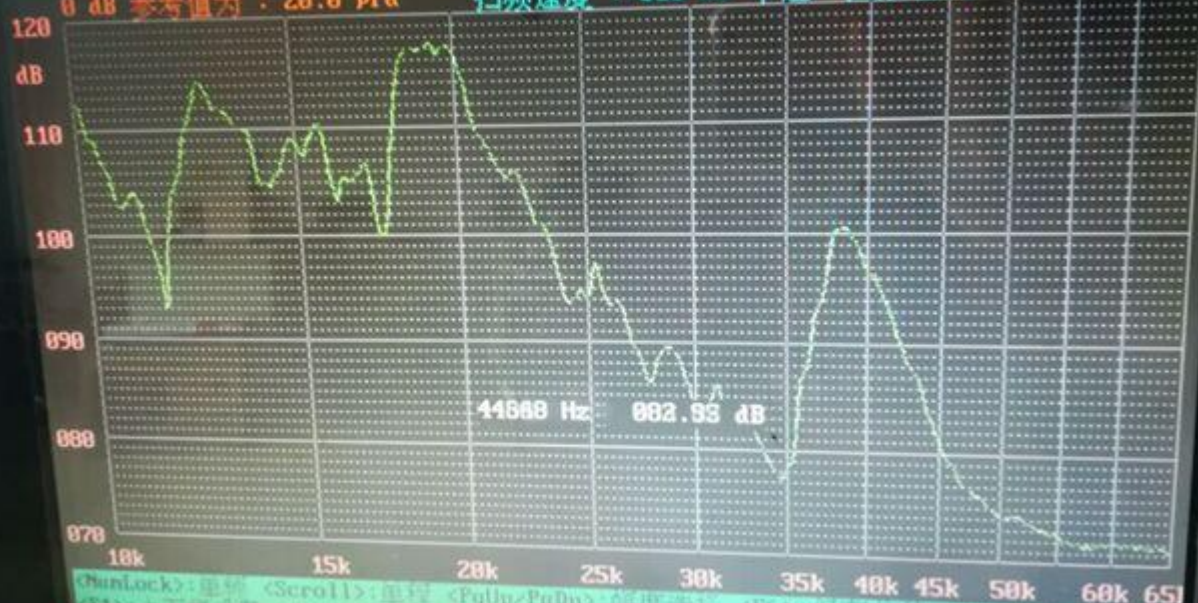

RunLock>:单程 <Scroll>:单程 <PgUp>/PgDn>:幅度选择 <F6>:保存曲线 <F7>:回显101030
<F1>:上下限设置 <F2>:单点Fc测量 <F4>:打印 <F5>:设置菜单 <F8>:计数清零 <F10>:保存